



Characteristics	Practical	Initial	Curie	Specific	Relative	Relative
特性	Frequency	Permeability	Temperature	Gravity	Loss	Temperature
	使用頻率	初透磁率	居里溫度	比重	Factor	初透磁率比
					比損耗因子	溫度係數
Material	ft(MHZ)	μ_{iac}	T.C(°C)	d(g/cm3)	$\tan \delta / \mu_i$ (x10-6MHZ)	$\alpha \mu_r$ (x10-6/°C 20°C~70°C)
材質						
Y8C	0.5~15	100	>300	4.8	<250 15	5~15


Loss factor vs Frequency

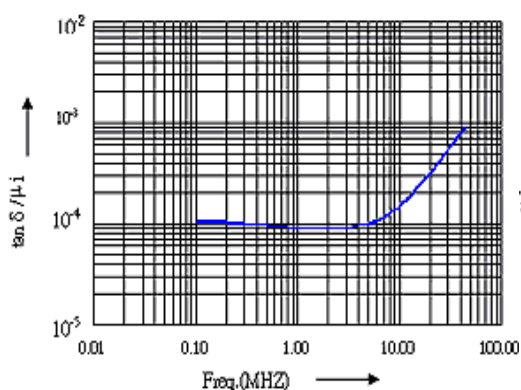

Initial permeability vs Frequency

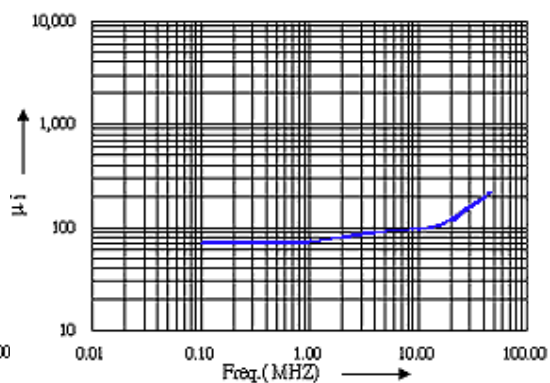

Quality Factor vs Frequency

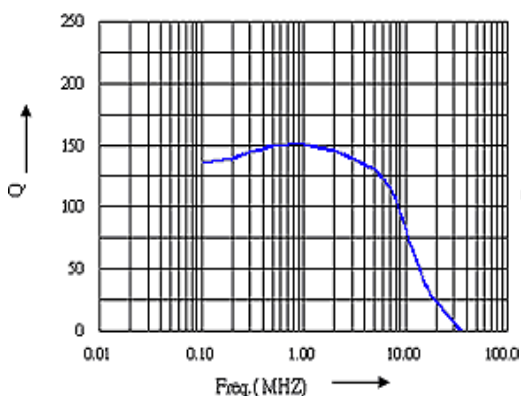

Inductance change to a function of Temperature

